

J MUFF™

EAR DEFENDERS - YELLOW

PRODUCT CODE: AEA000-010-200

POPULAR EAR DEFENDER SUITABLE FOR LIGHT INDUSTRIAL DUTY & OUTDOOR CONSTRUCTION

TECHNICAL SPECIFICATION

HEARING PROTECTION

INSTRUCTIONS FOR USE

Pull the earshells to the maximum extent of the headband

Fit earshells over the ears against the side of the head

Slide headband down until it touches the top of the head

OPEN CELL FOAM INSERTS:

Foam inserts provide extra comfort when in use



DIMENSIONS OF EAR DEFENDERS

Length: 176mm

Width: 183mm

Height: 77mm

Weight: 141g

Ear Defender Cup Open Area: 40mm x 70mm

CLEANING & MAINTENANCE

The ear defenders may be cleaned with soap and warm water and dried with a soft cloth

The ear defenders should not be cleaned with chemical or abrasive cleaners

Store out of direct sunlight, away from chemicals and not exposed to extremes of temperature



CONFORMITY

Conforms to EN 352-1

EU Type Examination Certificate Number 676978

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSPSAFETY.COM
TEL: +44 (0)1993 826050



Issued 11/01/19_V2

J MUFF™

EAR DEFENDERS - YELLOW

PRODUCT CODE: AEA000-010-200

POPULAR EAR DEFENDER SUITABLE FOR LIGHT INDUSTRIAL DUTY & OUTDOOR CONSTRUCTION


TECHNICAL SPECIFICATION

HEARING PROTECTION

DIMENSIONS OF OUTER PACKAGING


Quantity: 50

Weight: 9.5kg (Approx.)

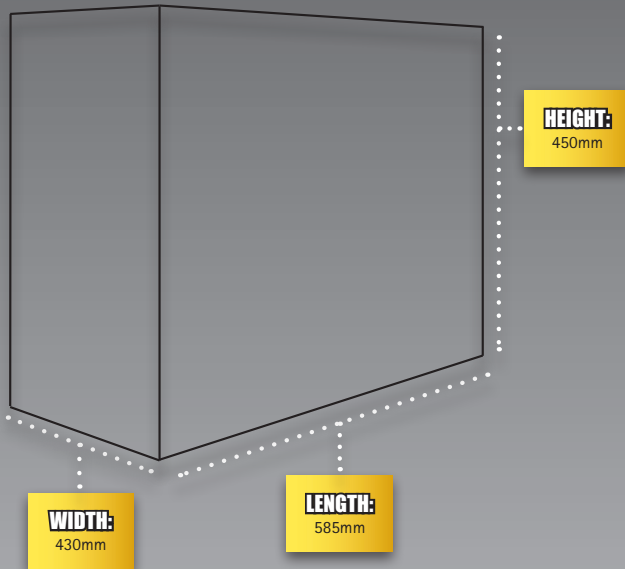

PERFORMANCE

Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	15.6	11.9	15.8	24.0	33.2	29.7	35.0	31.8
Standard Deviation (dB)	3.4	3.8	2.7	2.3	3.3	2.7	3.8	4.5
Assumed Protection (dB)	12.2	8.1	13.1	21.7	29.9	27.0	31.2	27.3
	H=29		M=23		L=15		SNR=25	

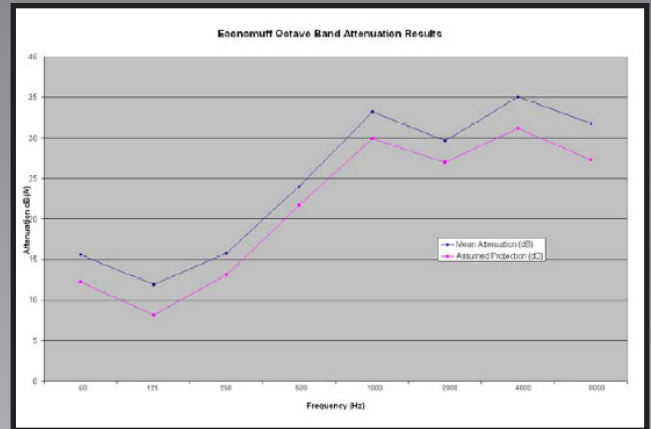

LIMITATIONS OF USE

Protection will only be offered if the ear defender is fitted correctly

Ear pads may deteriorate with use and should be examined at frequent intervals

The pads are available as a spare part

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The ear pads, when in contact with the skin may cause allergic reactions to susceptible individuals


If this occurs leave the hazard area, remove the ear defender and seek medical advice

If the ear defender is to be worn for long periods the noise level must be reduced to 80dB

Before selection of a suitable ear defender a noise survey should be carried out

Spectacle frames and hair between the ear pads and the head may affect the performance of the ear defender

Hearing Protection should be used in accordance with the European Physical Agents (Noise) Directive 2003/10/EC

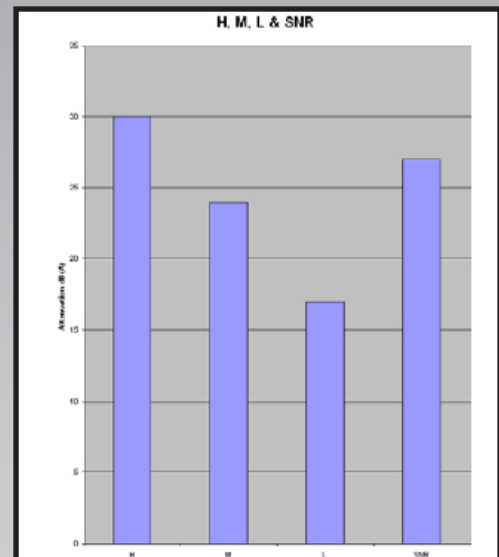

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jpsafety.com.



MANUFACTURING FOR SAFETY
WWW.JSPSAFETY.COM

UKSALES@JSPSAFETY.COM
TEL: +44 (0)1993 826050



Issued 11/01/19, V2